

## 093V Expansion Submittal Sheet

STOCK NO.	LENGTH	PCS. PER BOX
093V	10'	20



**Description:** Trim-Tex 093V Expansion is designed to allow for a full  $\frac{3}{8}$ " in controlled wall movement.

**Advantages:** Made from rust proof, dent resistant PVC to reduce jobsite and handling damage. Does not contain cellulose, a potential food source for mold.

**Fire Rated Assemblies:** For fire rated assemblies, use the Gypsum Association Fire Resistance Design Manual GA-600-2012. For a 1 hour fire wall use SRS1101. For a 2 hour wall use SRS1201. Other applicable assemblies are SRS1401, SRS2101, SRS2201, and SRS5101-SRS5104.

**Limitations:** Product is designed for interior use.

**Applicable Standards:** Rigid PVC products made by Trim-Tex meet ASTM specifications D3678, D1784, C1047 and achieve a Class A rating for flame spread and smoke developed when tested under ASTM E84. Flame spread: 15, smoke developed: 40.

**Surface Characteristics:** Trim-Tex products are made from PVC. PVC does not support combustion and is self-extinguishing when the source of flame or heat is removed.

**Installation:** Trim-Tex recommends following established acceptable industry standard installation methods. Detailed installation instructions can be found at [www.trim-tex.com](http://www.trim-tex.com).


**Finishing:** Always use a high quality paint.

**Accessories:** 847 Spray Adhesive and Safety Products distributed by Trim-Tex.

Job Name \_\_\_\_\_

Contractor \_\_\_\_\_

Date \_\_\_\_\_

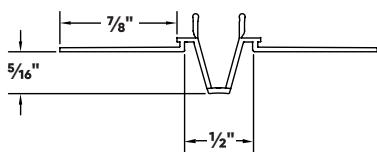

Approvals (Signatures or Stamps)