

Ecophon®

Advantage™ A
VOC Compliant

LOW VOC

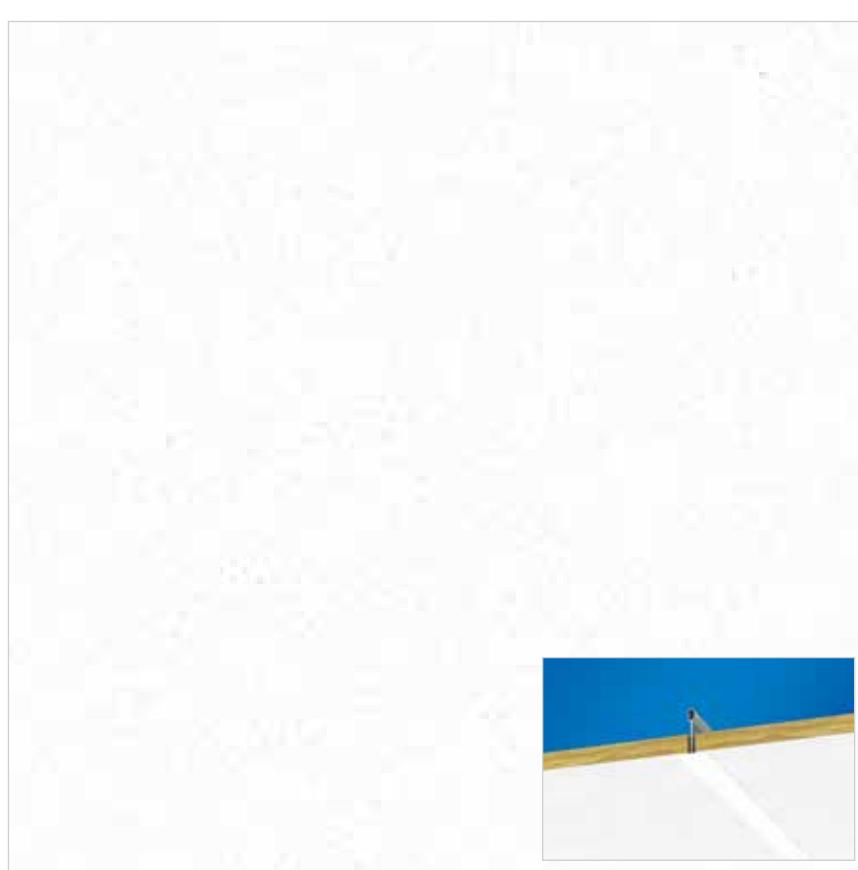
\$\$\$\$**LEED® v4**

- MR: Environmental Product Declarations (EPDs)
- MR: Sourcing Raw Materials
- MR: Material Ingredients (HPDs)
- IEQ: Daylight
- IEQ: Low-Emitting Materials
- IEQ: Prereq. Min. Acoustic Performance (Schools)
- IEQ: Acoustic Performance
- MR: PBT Source Reduction (Healthcare)
- IEQ: Interior Lighting
- EA: Prereq. Min. Energy Performance
- EA: Optimize Energy Performance
- Recycled Content
Pre: **1%** | Post: **70%**

TOOLS

Visit CertainTeed.com/Ceilings
Download HPDs and EPDs
LEED® Information / BIM Objects
3-Part Specs / Data Pages


EPD®

**FEATURES & BENEFITS**

- Exclusive 3RD™ technology combines high recycled glass content with a renewable plant-based binding agent, completely replacing traditional petroleum-based binding
- Extremely low particle emissions
- Superior sound absorption can help meet ANSI S12.60 classroom acoustic guidelines
- Smooth, monolithic surface appearance
- Sag and mold resistant

APPLICATIONS

- Offices (walls to deck)
- Education (walls to deck)
- Libraries
- Other Commercial Buildings / Space Applications

AVAILABLE EDGE DETAILS

Trim
15/16



Advantage™ A Trim (3545 1005)

ATTRIBUTES

	DIMENSIONS (INCHES)	EDGE DETAIL	NRC	CAC	SAG RESISTANT	MOLD RESISTANT	LR	WASHABLE	FIRE CLASS (ASTM E1264)	EMISSION COMPLIANT	LOW VOC	RECYCLED CONTENT
ADVANTAGE™ A												
3545 1914	24 x 24 x 9/16	Trim	0.85	18	Yes	Inherent	0.83	—	Class A	Certified	71%	
3545 1915	24 x 48 x 9/16	Trim	0.85	18	Yes	Inherent	0.83	—	Class A	Certified	71%	

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

PHYSICAL DATA

MATERIAL

Fiberglass

ASTM E1264 CLASSIFICATION

Type XII, Form 2, Pattern G

FIRE CLASS (ASTM E1264)

Tested according to ASTM E84 & CAN S102

Flame Spread: 25 or less

Smoke Developed: 50 or less

VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010.

MOLD/MILDEW RESISTANCE

Fiberglass substrate is inherently resistant to the growth of mold and mildew.

MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment.

WARRANTY

10-year Ecophon® Warranty

CertainTeed
SAINT-GOBAIN
Ceilings

Technical Support | certainteed.com/ceilings 800-233-8990

© 01/17 CertainTeed Corporation