
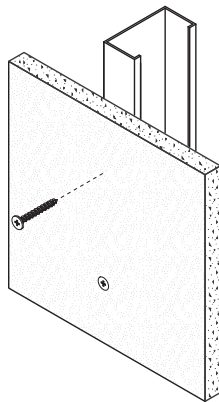


# Flat Wafer Head, Hi-Lo Thread, Streaker® - Exterior

Plywood, Cement Board to Light-Gauge Steel or Wood

**GRABBER®**  
CONSTRUCTION PRODUCTS



Phillips



Flat Wafer  
Head w/  
Nibs



Hi-Lo  
Alternating  
Threads



Streaker®  
Point

**Description** Attaches high-density sheathing to light-gauge steel or wood.

**Specifications**

**Size | Gauge:** #8 and #10  
**Length:** 1 1/4 in. to 3 1/2 in.  
**Head Type:** Flat Wafer Head  
**Recess Type:** #2 Phillips  
**Thread Type:** Hi-Lo Alternating  
**Thread Length:** Varies by item.  
Refer to the thread length reference section for specific dimensions.  
**Finish:** GrabberGard® 1500

**Quality Assurance:** Grabber® fasteners are manufactured in ISO 9001 and ISO 14001 certified and approved factories.  
**LEED Reporting:** The post-consumer recycled steel content is 25%.  
**Compliance:** The fasteners comply with ASTM C1513 performance requirements. Specific fasteners are listed in ICC ESR-5616; please check the report for listed item numbers.

**Applications**

- Cement board to light-gauge steel or wood
- High-density board to light-gauge steel or wood
- Tile backers to light-gauge steel or wood

**Installation**

- Use a standard screw gun with a depth-sensitive nose piece. Suggested screw gun specification for optimal performance: sizes #8 and #10, up to 4,000 RPM.
- The screw head is fully seated when it is flush with the surface of the material.
- The fastener must penetrate beyond the steel three full thread pitches.
- The fastener should penetrate the wood at least 3/4 in., in accordance with AWC-NDS for wood construction.
- Overdriving may result in failure of the fastener.

**Features**

- Grabber's #2 Phillips is a precision recess designed for better bit engagement, resulting in less wobble or strip-out.
- This wafer head design provides for a larger load-bearing surface and better holding power.
- Underhead nibs ensure flush countersinking.
- Alternating, Hi-Lo threads reduce torque and increase holding power.
- GrabberGard® exterior-grade coating provides additional protection against corrosion in most exterior applications.

# Flat Wafer Head, Hi-Lo Thread, Streaker® - Exterior

Plywood, Cement Board to Light-Gauge Steel or Wood

**GRABBER®**  
CONSTRUCTION PRODUCTS

Light-Gauge Steel

Plywood, Cement Board to Light-Gauge Steel or Wood

## Standard Corrosion Test Results

| Finish            | Test       | Standard/Protocol | Results                 |
|-------------------|------------|-------------------|-------------------------|
| GrabberGard® 1500 | Salt Spray | ASTM B117         | 1,500 hrs., no red rust |

Note: Salt Spray Testing (SST) results are not intended to predict corrosion in real-world environments. The ASTM B117 standard for SST is recognized industry-wide as an effective tool for comparing different metals and different metal coatings in a tightly controlled, highly corrosive environment for specific periods of time. For more information about corrosion resistance, see the Grabber Guide to Corrosion Resistance for Fasteners.


## Pull-Out Test Data¹

| Screw Gauge | TPI²     | Steel Gauge | Design Thickness | Tension | Shear    |
|-------------|----------|-------------|------------------|---------|----------|
| #8          | 15 Hi-Lo | 25          | 0.0188 in.       | 39 lbs. | 66 lbs.  |
|             |          | 20          | 0.0346 in.       | 72 lbs. | 164 lbs. |
| #10         | 15 Hi-Lo | 25          | 0.0188 in.       | 46 lbs. | 71 lbs.  |
|             |          | 20          | 0.0346 in.       | 84 lbs. | 177 lbs. |

¹Test data values reported are allowable as determined by calculations and industry established test criteria, such as ICC-ES Acceptance Criteria and ASTM test standards. Please contact Grabber for detailed information about testing performed for specific products or if ultimate values are needed.

## Sheet Steel Gauges

| Gauge No. | Design Thickness | Millimeter Equivalent |
|-----------|------------------|-----------------------|
| 25        | 0.0188 in.       | 0.4775 mm             |
| 20        | 0.0346 in.       | 0.8788 mm             |



## Product Dimensions

| Screw Size | B Head Dia. | Recess      | D1 Hi Thread Major Dia. | D2 Lo Thread Major Dia. | TPI²     |
|------------|-------------|-------------|-------------------------|-------------------------|----------|
| #8         | 0.404 in.   | #2 Phillips | 0.142 in.               | 0.177 in.               | 15 Hi-Lo |
| #10        | 0.404 in.   | #2 Phillips | 0.161 in.               | 0.195 in.               | 14 Hi-Lo |

²TPI stands for Threads Per Inch. This is a count of the number of threads per inch measured along the length of a fastener.

**Thread Length:** Dimensions vary by item. Consult the thread length reference section at the back of the catalog for item-specific details.

## Ordering Information and Product Options

| Item No.                      | Size           | Recess      | Head Dia. | TPI      | Quantity | Weight | Special Features             |
|-------------------------------|----------------|-------------|-----------|----------|----------|--------|------------------------------|
| <b>GrabberGard® Gray 1500</b> |                |             |           |          |          |        |                              |
| GCB8125HL                     | 8 x 1 1/4 in.  | #2 Phillips | 0.404 in. | 15 Hi-Lo | 5,000    | 25 lb. | Underhead nibs               |
| GCB8158HL                     | 8 x 1 5/8 in.  | #2 Phillips | 0.404 in. | 15 Hi-Lo | 4,000    | 29 lb. | ICC ESR-5616, Underhead nibs |
| GCB8238HL                     | 8 x 2 3/8 in.  | #2 Phillips | 0.404 in. | 15 Hi-Lo | 3,000    | 30 lb. |                              |
| GCB10350HL                    | 10 x 3 1/2 in. | #2 Phillips | 0.404 in. | 14 Hi-Lo | 1,000    | 20 lb. | Underhead nibs               |

Note: Product availability is subject to change without prior notice and the availability of products may differ from what is printed in literature and displayed on our website. The items listed are bulk size. Most are also available in smaller package sizes such as 5 lb. and 1 lb. Contact your local Grabber Branch or GrabberPro for more information.

Flat Wafer Head, Hi-Lo Thread,  
Streaker® - Exterior  
PS1036 USA-ENG/Rev. 2-26

Grabber Construction Products, Inc.  
3125 W. Executive Pkwy., Suite 200  
Lehi, UT 84048

(800) 477-8876 | GrabberPro.com

**SAFETY FIRST:** Wear appropriate personal protective equipment. Read applicable SDS and literature before handling and installation.

**TECHNICAL INFORMATION:** Technical information contained herein is furnished without charge or obligation and is given and accepted at the recipient's sole risk. Because conditions of use may vary and are beyond our control, Grabber Construction Products makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with uses of any product described herein. Grabber Construction Products reserves the right to modify this document without prior notice.

© 2026 Grabber Construction Products, Inc. | All rights reserved | Printed in U.S.A.  
The trademarks Grabber, GrabberGard, Streaker, and Stylized G on Grabber Fasteners, are trademarks of Grabber Construction Products, Inc.

