

DW-5058

Recessed Access door for 5/8" drywall,
Drywall Panel Door

Application

- Designed to provide access in walls and ceilings, while maintaining an invisible, architecturally pleasing appearance

Product Features

- Designed for installation in 5/8" drywall
- Aluminum Extrusion Door & Frame
- Powder Painted
- Dust seal gasket
- Concealed Touch latch

DW-5058 Access Door Specifications:

Material: Aluminum extrusion with drywall fitted in door panel

Door Frame: Aluminum extrusion 6063-T6 recessed to provide similar edge to drywall bead to allow for finishing of wall or ceiling surface.

Hinge: Wing hinge allows door panel to open to 90 degrees, and also allows for door panel to be removed from frame. Safety chain installed on door & frame for safety.

Gasket: Dust seal gasket

Standard Latch: Concealed Touch Latches

Optional Latches/Locks: Slotted Screwdriver Cam Latch, allen head cam latch, spanner head cam latch, cylinder lock & key.

Finish: Baked White Prime Coat

(Additional finish paint is recommended for superior corrosion resistance)

STANDARD SIZES (other sizes available upon request)


Nominal Door Size W&H		Weight per Door	
inches	mm	lbs.	kg.
8 x 8	203 x 203	1.5	0.7
12 x 12	305 x 305	2.0	0.9
16 x 16	406 x 406	5.0	2.3
18 x 18	457 x 457	6.0	2.7
24 x 24	610 x 610	12.0	5.5
24 x 36	610 x 914	21.0	9.5

Wall opening is normal door size plus +3/8" (9.5mm)

For detailed specifications see submittal sheet






FOR WALL INSTALLATION, HINGE SHOULD BE LOCATED AT BOTTOM

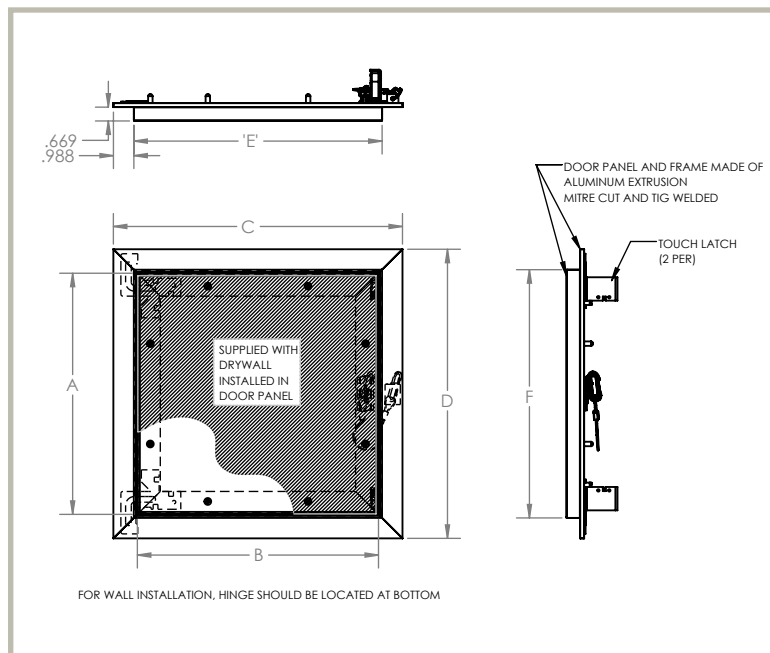

STANDARD SIZES *(other sizes available upon request)*

Nominal Door Size W&H		Weight per Door	
inches	mm	lbs.	kg.
8 x 8	203 x 203	1.5	0.7
12 x 12	305 x 305	2.0	0.9
16 x 16	406 x 406	5.0	2.3
18 x 18	457 x 457	6.0	2.7
24 x 24	610 x 610	12.0	5.5
24 x 36	610 x 914	21.0	9.5

Wall opening is normal door size plus +3/8" (9.5mm)
For detailed specifications see submittal sheet

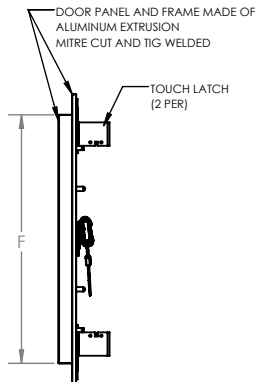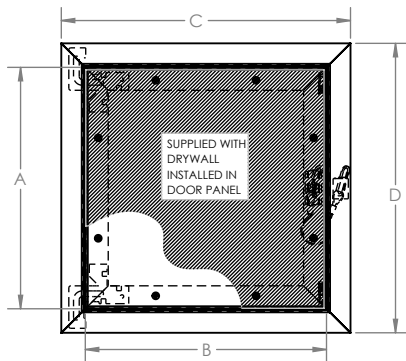

FOR WALL INSTALLATION, HINGE SHOULD BE LOCATED AT BOTTOM