


Fast Cap Submittal Sheet

STOCK NO.	SIZE	LENGTH	PCS. PER BOX
4410	4 $\frac{5}{8}$ "	10'	10
4510	4 $\frac{7}{8}$ "	10'	10
4883	3 $\frac{1}{2}$ "	10'	10
4810	3 $\frac{3}{4}$ "	10'	10

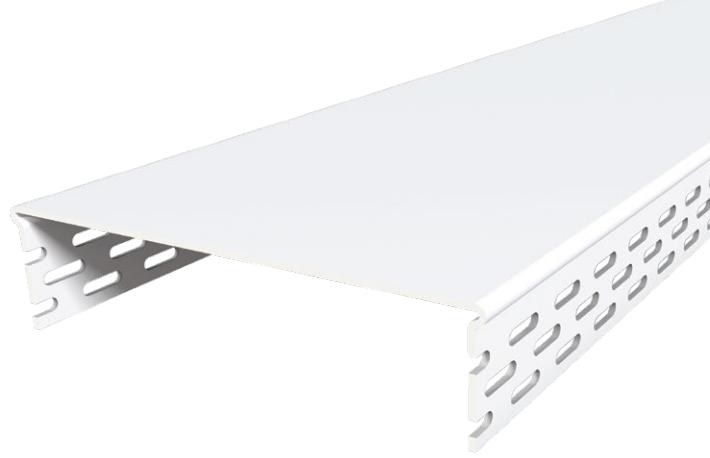

Description: Trim-Tex Fast Cap & Archway is designed to finish doorways, wall ends, kneewalls, and closets by eliminating the need for the drywall face and 2 corner beads.

Advantages: Made from rust proof, dent resistant PVC to reduce jobsite and handling damage. Does not contain cellulose, a potential food source for mold.

Limitations: Product is designed for interior use.

Applicable Standards: Rigid PVC products made by Trim-Tex meet ASTM specifications D3678, D1784, C1047 and achieve a Class A rating for flame spread and smoke developed when tested under ASTM E84.


Surface Characteristics: Trim-Tex products are made from PVC. PVC does not support combustion and is self-extinguishing when the source of flame or heat is removed.

Installation: Trim-Tex recommends following established acceptable industry standard installation methods. Detailed installation instructions can be found at www.trim-tex.com.

Finishing: Always use a high quality paint.

Accessories: 847 Spray Adhesive and Safety Products distributed by Trim-Tex.

Job Name _____
 Contractor _____
 Date _____



Approvals (Signatures or Stamps)