


Fire Gasket® Submittal Sheet

| STOCK NO. | SIZE | LENGTH | FT/BOX | PCS/BOX |
|-----------|--------|--------|--------|---------|
| 9405 | 1/2" | 5' | 300' | 60 |
| 9410 | 1" | 5' | 300' | 60 |
| 9415 | 1 1/2" | 5' | 250' | 50 |

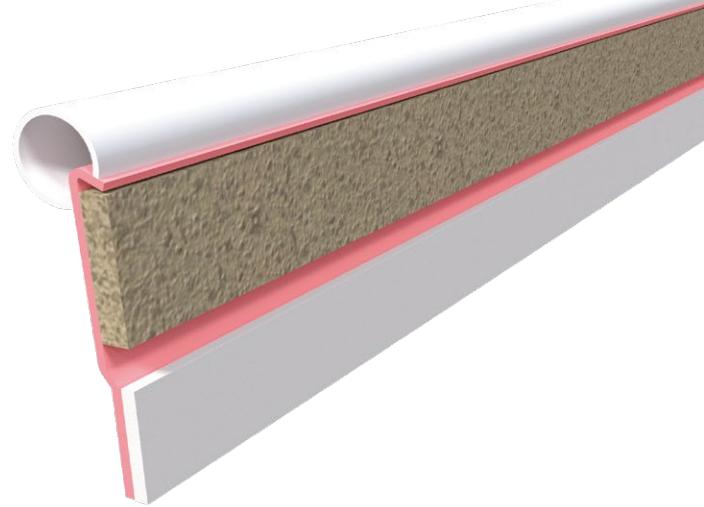

Description: Fire Gasket is a fire rated composite vinyl intumescent accessory that provides fire ratings for both dynamic and static joints with both concrete and fluted deck assemblies according to UL-2079 5th Edition. It is designed to be installed against perimeter framing members: top and bottom tracks and perimeter studs.

- Tested with up to 100% compression AND 100% extension.
- Remains flexible for life of the assembly.
- Can be used in top-of-wall, bottom-of-wall, and vertical joints.
- Can be installed to the track leg before or after attaching the track to the deck.
- Installs fully cured, unaffected by water/moisture/temperature.
- L-rating (smoke rating) of below 1 CFM.
- Provides Sound Transmission Classification (STC) ratings up to 67.
- No additional firestop sealant or spray required over metal deck mineral wool flute fillers.
- Available in pink for use in concealed locations and black for exposed locations.
- Paintable.

Advantages: Made from rust proof, dent resistant PVC to reduce job-site and handling damage. Does not contain cellulose, a potential food source for mold. Intumescent tape expands when exposed to flame for increased fire protection.


Surface Characteristics: Trim-Tex® products are made from PVC. PVC does not support combustion and is self-extinguishing when the source of flame or heat is removed.

Installation: Trim-Tex® recommends following established acceptable industry standard installation methods. Detailed installation instructions can be found at www.trim-tex.com.


Accessories: Safety Products distributed by Trim-Tex®.

ASTM & Code Standards:


- ASTM E-84
- ASTM E-119
- ASTM E-1966
- UL 263
- UL 723
- UL 2079 5th Edition
- Cal State Fire (BML) 1451-2376:0004
- UL ER25033-01
- L-Rating (air leakage) testing for compliance with International Building Code (IBC) and Canadian Building Code (CBC).
- UL listings/approvals include: BW-S-0024; BW-S-0053; HW-D-0514; HW-D-0515; HW-D-0518; HW-D-0524; HW-D-0525; HW-D-0550; HW-D-0551; HW-D-0553; HW-D-0554; HW-D-0573; HW-D-0585; HS-D-0587; HW-D-0596; HW-D-0620; HW-D-0621; HW-D-0622; HW-D-0623; HW-D-0624; HW-D-0625; HW-D-0652; HW-D-0653; WW-D-0104; WW-S-0094
- U.S. Patent No. 10,246,871; 10,753,084; 10,954,670
- Fire Gasket has been tested and approved for the Canadian market.
- CAN/ULC-S115 Standard Method of Fire Tests of Firestop Systems.

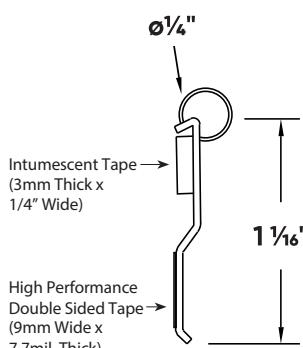

Fire Gasket 0.5

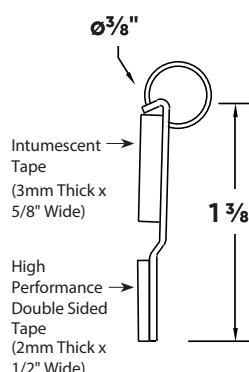

Fire Gasket 1

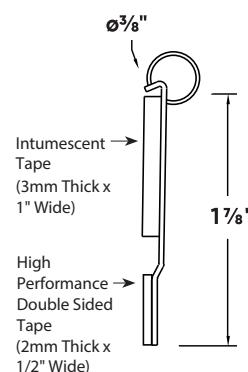

Fire Gasket 1.5

Job Name _____

Contractor _____

Date _____

Approvals (Signatures or Stamps)