

Hotrod® XL Submittal Sheet

STOCK NO.	LENGTH	PCS. PER BOX
9280	10'	10



Description: Hotrod XL is a fire rated wall mount deflection bead that provides 1- and 2-hour fire ratings for both dynamic and static joints for both fluted deck and concrete assemblies according to UL-2079 5th Edition (for both standard walls and shaft walls) and no spray is required over mineral wool, and is sound tested according to ASTM E90. Sound Reports available upon request. Hotrod XL provides a full $\frac{3}{4}$ " of building movement.

- Tested with up to 80% compression and 30% extension.
- Combines compressible foam, a vinyl concealment leg along and intumescent strip to provide an aesthetically pleasing joint.
- Provides one and two hour fire ratings from the same profile.
- Provides a single step installation of both a code compliant firestop and finished drywall accessory in one piece.
- Pink perforated mud leg for ease of inspection.
- Installs on the face of the drywall with a perforated mud leg incorporated to accept joint compound.
- Can be used with CEMCO Spray-less Flute Clips to eliminate need for additional firestop sealant or spray.
- Easily installs using spray adhesive and staples.
- Installs fully cured and is paintable.
- Does not have temperature or humidity limits for installation.
- Provides Sound Transmission Classification (STC) ratings up to 68.

Advantages: Composite vinyl/intumescent firestopping accessory that is fully cured. Comes in 10' lengths with a $\frac{5}{16}$ " tear off leg that acts as a guide to apply joint compound without masking off adjoining surfaces. Made from rust proof, dent resistant PVC to reduce jobsite and handling damage. Does not contain cellulose, a potential food source for mold, and provides an unlimited shelf life.

Surface Characteristics: Trim-Tex® products are made from PVC.

Installation: Trim-Tex® recommends following established acceptable industry standard installation methods. Detailed installation instructions can be found at www.trim-tex.com.

Accessories: Safety Products distributed by Trim-Tex®.


ASTM & Code Standards:

- ASTM E-84
- ASTM E-90
- ASTM E-119
- ASTM E-1966
- UL 263
- UL 723
- UL 2079 5th Edition
- Cal State Fire (BML) 1451-2376:0003
- UL ER25033-01
- L-Rating (air leakage) testing for compliance with International Building Code (IBC) and Canadian Building Code (CBC).
- UL listings/approvals include: BW-S-0024; HW-D-0550; HW-D-0554; HW-D-0621; HW-D-0624; HW-D-0625; HW-S-0128; WW-S-0057; WW-S-0094
- U.S. Patent No. 9,683,364; 10,184,246; and 10,914,065
- Hotrod XL has been tested and approved for the Canadian market.
- CAN/ULC-S115 Standard Method of Fire Tests of Firestop Systems.

Job Name _____

Contractor _____

Date _____

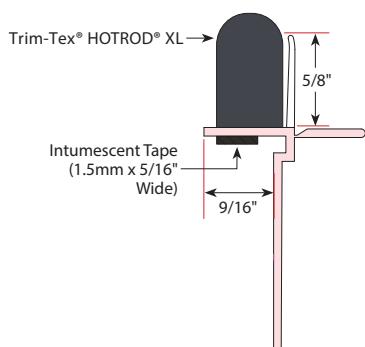

Approvals (Signatures or Stamps)