

## Spazzer® 5400 Spacing and Bridging Bar - 16ga (SPZS-54)


### 54mils (16ga) Spazzer 5400 (Exterior) Spacing and Bridging Bar

The Spazzer 5400 bar is a prenotched bridging and spacing bar engineered to facilitate the rapid erection of structural wall framing.

Spazzer 5400 (SPZS-54) bar is a prenotched, 54mils (16ga), 50" long galvanized steel spacer and bridging bar, engineered to facilitate the rapid erection of exterior curtainwall framing, load-bearing walls and high interior partitions constructed of structural studs.

For load-bearing studs or for 20ga nonload-bearing studs, the [Spazzer 5400 Bar Guard™](#), the [Spazzer Bar Fly Clip \(SFLY\)](#), the [Spazzer Snap-In Grommet](#) or screws are required to keep the bar in place.

**The Spazzer 5400 is not designed for use with 12 ga and heavier structural studs, and should not be used in studs over 8" wide.**

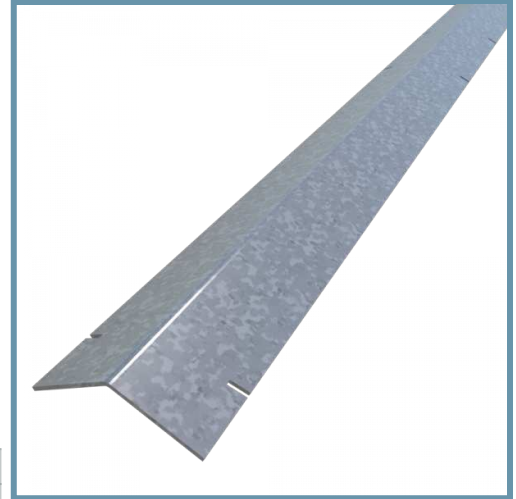

### Product Data & Ordering Information:

|                        |                                                                 |
|------------------------|-----------------------------------------------------------------|
| <b>Material:</b>       | Grade 50ksi min. (340MPa)                                       |
| <b>Coating:</b>        | CP60 (G90 available)                                            |
| <b>Thickness:</b>      | 54mils (16ga), 0.0566" Design Thickness, 0.0538" Min. Thickness |
| <b>Dimensions:</b>     | 1-1/4" x 1-1/4" (31.8mm x 31.8mm)                               |
| <b>Stock Lengths:</b>  | 50" Long (1270mm)                                               |
| <b>Packaging:</b>      | 20 pieces per carton / 680 pieces per skid                      |
| <b>Product Weight:</b> | 2.03 lb/piece                                                   |

- Up to 90% faster install when used in a non-load bearing application.
- Prenotched at 12", 16" and 24" intervals, so no layout is needed.
- Eliminates clip angles and the labor required to install them.

### Code Approvals & Performance Standards


- [ASTM A653](#) Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
- [ASTM A1003](#) Standard Specification for Steel Sheet, Carbon, Metallic- and Nonmetallic-Coated for Cold-Formed Framing Members
- [SDS For ASTM A1003 Steel Framing Products](#) For Interior Framing, Exterior Framing and Clips/Accessories

### Alternative Products:

- [U-channel \(CRC\) with clip angles](#)
- [Blocking and Strapping](#)

**Sustainability Credits** For more details and LEED letters contact Technical Services at 888-437-3244 or visit [clarkdietrich.com/LEED](http://clarkdietrich.com/LEED).

- **LEED v4.1 MR Credit:** Environmental Product Declarations: EPD (1 point) - Sourcing of Raw Materials (up to 2 points) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points)
- **LEED v4 MR Credit:** Building Product Disclosure and Optimization: EPD (1 point) - Sourcing of Raw Materials (1 point) - Material Ingredients (1 point) - Construction and Demolition Waste Management (up to 2 points) - Innovation Credit (up to 2 points).

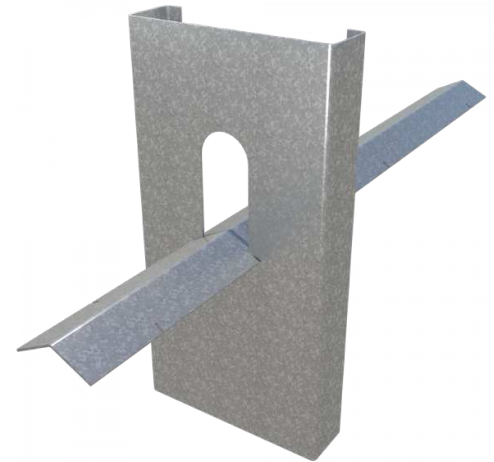

Spazzer®  
Snap-In  
Grommet



Spazzer® Bar Guard™