



Super Seal-X Spec Sheet

STOCK NO.	LENGTH	PCS. PER BOX
9210X	10'	25
9210XB	10'	25

Description: Super Seal-X is a surface mounted deflection bead tested to UL 2079. It provides 1 & 2 hour firestop solutions in vertical joints for both standard wall and shaft wall types between dissimilar material applications.

- Tested over vertical window aluminum mullions WW-D-0182.
- Tested with up to 50% compression.
- Installs fully cured, unaffected by water/moisture/temperature.
- Available in all black and pink vinyl with white bubble gasket.
- Combines a vinyl bubble gasket, a perforated mud leg and intumescent strip to provide an aesthetically pleasing joint when in an exposed location.
- Provides a single step installation of both a code compliant firestop and finished drywall accessory in a single component.
- Installs on the face of the drywall with a perforated mud leg incorporated to accept joint compound.
- Easily installs using spray adhesive and staples.
- Remains flexible for the life of the assembly.
- Can be used in top-of-wall, bottom-of-wall and vertical joints.
- Provides up to 50 Sound Transmission Classification (STC) rating.
- Paintable.

Storage/Warranty:

- When stored indoors and kept dry in its original package and condition, Super Seal-X has an unlimited shelf life.
- 25 Year Limited Warranty – see Trim-Tex Standard Fire, Smoke & Acoustic Product Warranty for details.

Advantages: Composite vinyl/intumescent firestopping accessory that is fully cured. Comes in 10' lengths with a $\frac{5}{16}$ " tear off leg that acts as a guide to apply joint compound without masking off adjoining surfaces. Made from rust proof, dent resistant PVC to reduce jobsite and handling damage. Does not contain cellulose, a potential food source for mold, and provides an unlimited shelf life.

ASTM & Code Standards:

- Sound Tested in accordance with ASTM E90-09
- ASTM E84
- ASTM E90
- ASTM E-1966
- UL 2079 5th Edition
- UL ER25033-01
- L-Rating (air leakage) testing for compliance with International Building Code (IBC) and Canadian Building Code (CBC).
- UL listings/approvals include: BW-S-0024; HW-D-0550, HW-D-0554; HW-D-0624; HW-S-0128; WW-D-0104; WW-D-0172; WW-D-0182
- U.S. Patent No. 11,111,666; 11,873,636
- Super Seal-X has been tested and approved for the Canadian market.
- CAN/ULC-S115 Standard Method of Fire Tests of Firestop Systems.

Installation Guide

Before Installation:

Ensure there is a $\frac{3}{8}$ " gap between the drywall edge and adjacent surface. Measure, cut and dry fit the bead.

Step 1:

Coat the bead with Trim-Tex 847 Spray Adhesive.

Step 2:


Press the bead in place, applying pressure to the mud legs.

Step 3:

Staple every 6"-8" using $\frac{1}{2}$ " staples.

Step 4:

Finish with drywall compound. Remove tear-off strips prior to sanding.

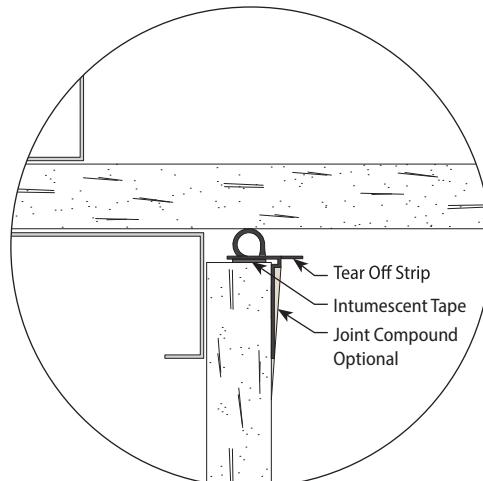

Scan Below
to Learn More

