

WD-8000

DUCT & SPECIALTY DOORS Walk Through Door

Application

- Designed to provide convenient walk through access to duct work interiors & air handling units
- Low to medium pressure systems and plenums

Product Features

• Heavy duty construction, along with a continuous hinge and compression handles Optional Features: Removable Door Panel / Vision Panel / High Pressure Units / Key Operated Handles

WD-8000 Access Door Specifications:

Material: Galvanized steel, also available in Aluminum and Stainless Steel

Door: 22 gauge

Mounting Frame: Double panel frame is 1 15/16" wide x 1 1/2" deep extruded

aluminum with mitred corners

Gasket: 1/8" thick x 1/2" wide closed cell neoprene gasketing between door and

Hinge: Continuous steel piano hinge-opens 180 degrees

Insulation: Door panel filled with 1" thick fiberglass insulation - 4 R value **Standard Latch:** Dual acting compression handles-operable from both sides

Units 48" high and under to have 2 handles Units over 48" high to have 3 handles

Finish: Mill finish




WD-8000 STANDARD SIZES

(other sizes available upon request)

Nominal Door Size W&H		Weight pe	Weight per Door	
inches	mm	lbs.	kg.	
24 x 36	610 x 914	21.0	9.5	
24 x 48	610 x 1219	28.2	12.8	
24 x 60	610 x 1524	33.8	15.3	
24 x 72	610 x 1829	41.7	18.9	
30 x 36	762 x 914	25.3	11.5	
30 x 48	762 x 1219	36.2	16.4	
30 x 60	762 x 1524	42.5	19.3	
30 x 72	762 x 1829	80.6	36.6	

Wall opening is normal door size plus +3/8" (9mm) For detailed specifications see submittal sheet

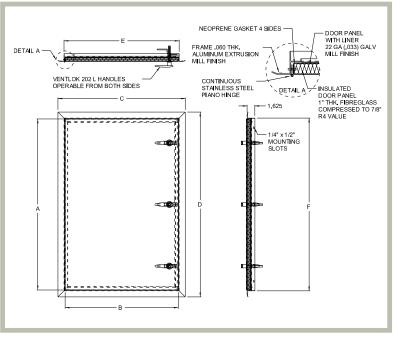

U.S.A.: info@acudor.com / 800.722.0501 MEXICO: infomx@acudor.com / +52 844 171 6595

CANADA: info@acudor.ca / 844.228.3671 INDIA / MIDDLE EAST / NORTH AFRICA: ap-imea@acudor.com / +971-4-399-6966

INTERNATIONAL: info@acudorintl.com / 905.428.2240 SITE: www.acudor.com